


ABAQUES BRAS pour une profondeur C ≥ 150 MM




Abaque bras W1 (livrés dans les kits) pour une profondeur C ≥ 150 mm										
A \ B	30-40	41-50	51-60	61-70	71-80	81-90	91-100	101-110	111-120	121-130
0-5										
6-10										
11-15										
16-20										
21-25										
26-30										
31-35										
36-40										
41-45										
46-50										
51-55										
56-60										
61-65										
66-70										
71-75										

Ce tableau s'applique pour des volets de 28 mm équipés d'une butée.

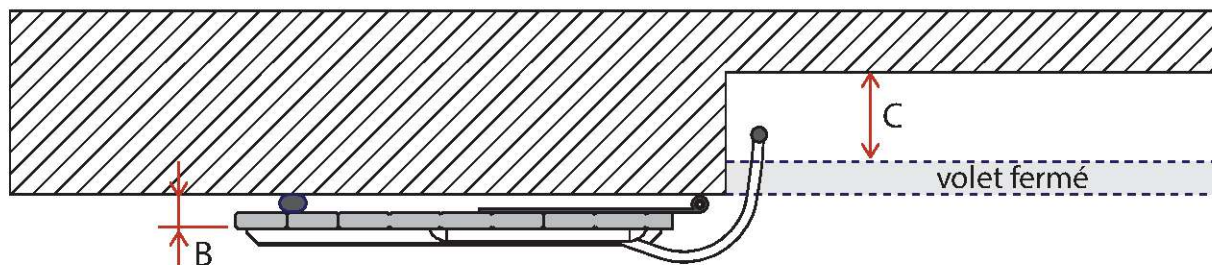


bras W1

Réf.	Désignation
K0001950BR	Bras w1 brut
K0001950BL	Bras w1 blanc RAL 9010
K0001950N	Bras w1 noir RAL 9005

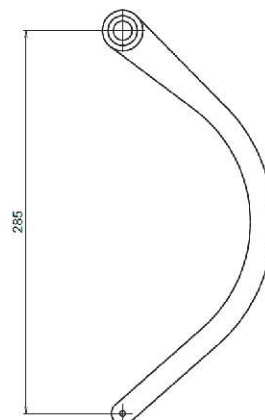

ABAQUES BRAS pour une profondeur C ≥ 100 MM

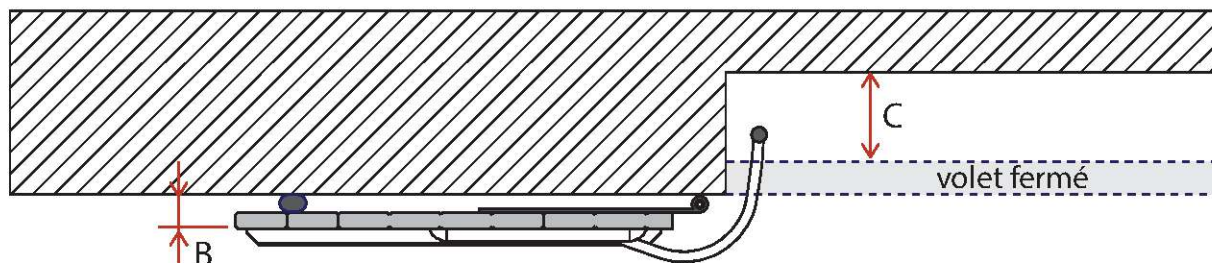

Abaque bras W2 & W3 pour une profondeur C ≥ 100 mm

A \ B	30-40	41-50	51-60	61-70	71-80	81-90	91-100	101-110	111-120	121-130	131-140
0-5											
6-10											
11-15											
16-20											
21-25											
26-30											
31-35											
36-40											
41-45											
46-50											
51-55											
56-60											

bras W2

bras W3

Ce tableau s'applique pour des volets de 28 mm équipés d'une butée.



Réf.	Désignation
K0001951BR	Bras w2 brut
K0001951BL	Bras w2 blanc RAL 9010
K0001951N	Bras w2 noir RAL 9005
Réf.	Désignation
K0001952BR	Bras w3 brut
K0001952BL	Bras w3 blanc RAL 9010
K0001920N	Bras w3 noir RAL 9005

Bras W2 :

Bras W3 :

